


Interactive Touchscreen Solutions, Inc.

Model #: 15FP-EK

Size: 15.0" diagonal
 Type: Active matrix TFT LCD
 Aspect ratio: 4 x 3
 Useful Screen Area: Horizontal 12.0" X Vertical 9.0"
 1024 x 768 resolution
 Colors: 16.2 million
 Brightness: 250 cd/m² (typical)
 Response time: 14.5 msec (typical)
 Viewing Angle: Horizontal (left/right): ±70° or 140° total
 Vertical (up/down): ±60/55° or 115° total
 Contrast Ratio: 500:1 typical
 Input Video Signal Connector: Mini D-Sub 15-Pin VGA type

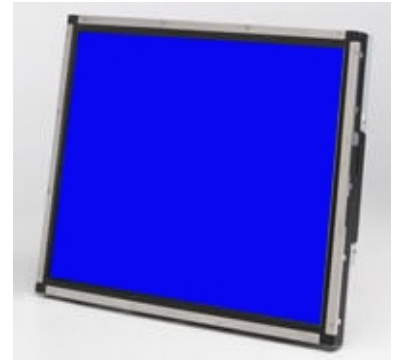



Power dissipation:
 Monitor only: 30 W max.

Temperature: Operating: 0°C to 40°C
 Storage: -20°C to 60°C


Humidity: Operating: 20%-80%
 Storage: 10%-90% noncondensing

Weight: 6.6 lb (3.0 kg)


Backlight lamp life: typical 30,000 hours
 to half brightness

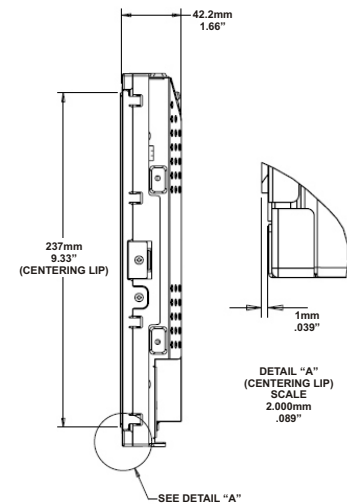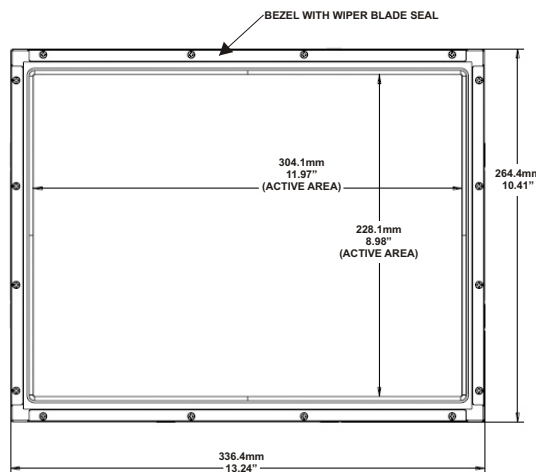


RECOMMENDED CUSTOMER PANEL CUT-OUT (See Note A)

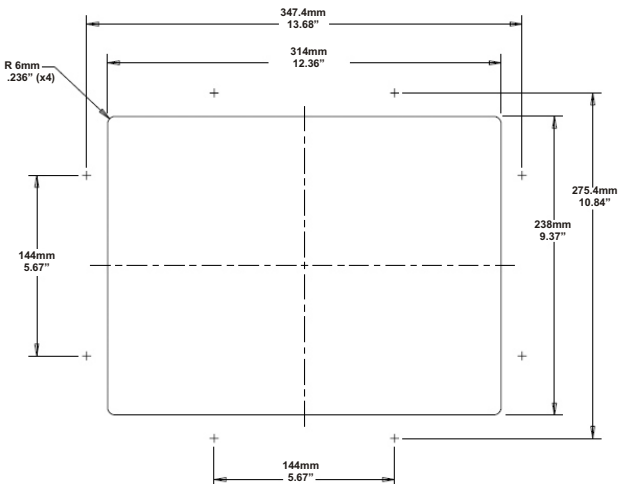

MOUNTING BRACKETS ACCOMMODATE MAX 14mm (.551") MATERIAL THICKNESS

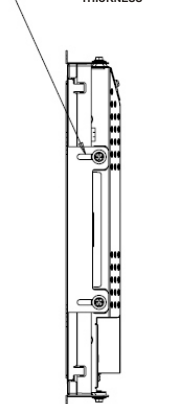

REAR MOUNT WITH BRACKETS, HORIZONTAL & VERTICAL

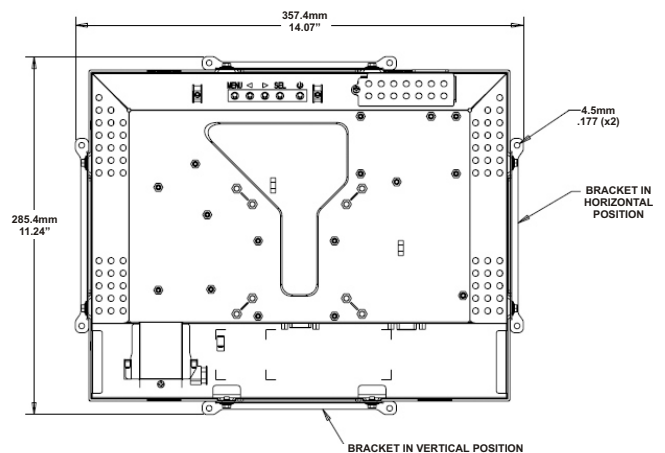

NOTE A
 CUSTOMER PANEL MATERIAL:

- WOOD: Ø 4.5 HOLES THRU FOR M4 SCREWS W/NUTS, OR, NO THRU HOLES, SCREWS FOR WOOD Ø 4mm,
- SHEET METAL: CONCEALED HEAD THREADED STUDS M4 W/NUTS.

