

Interactive Touchscreen Solutions, Inc.

Model #: 26FP-EK

Size: 26.0" diagonal
 Type: Active matrix TFT LCD
 Aspect ratio: 16 x 9

Useful Screen Area: Horizontal 22.7" X Vertical 12.7"

1366 x 768 resolution

Colors: 16.7 million

Brightness: 500 cd/m² (typical)

Response time: 20 msec (typical)

Viewing Angle: Horizontal (left/right): ±88° or 176° total
 Vertical (up/down): ±88° or 176° total

Contrast Ratio: 1500:1 typical

Input Video Signal Connector: Analog: 15-pin female D-Sub
 Digital: Female DVI-D

Power consumption:

93.3 W typical, 130 W max.

(at 120V/60Hz)

Temperature: Operating: 0°C to 40°C



Storage: -20°C to 60°C

Humidity: Operating: 20%-80%


Storage: 10%-90% noncondensing

Weight: 31.3 lb (14.2 kg)


Backlight lamp life: 60,000 hours
 typical, 50,000 min.

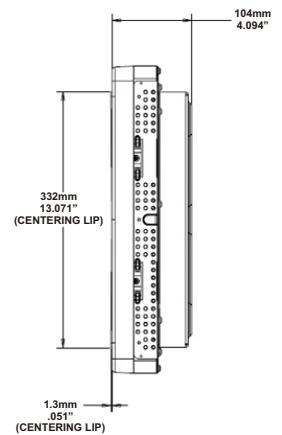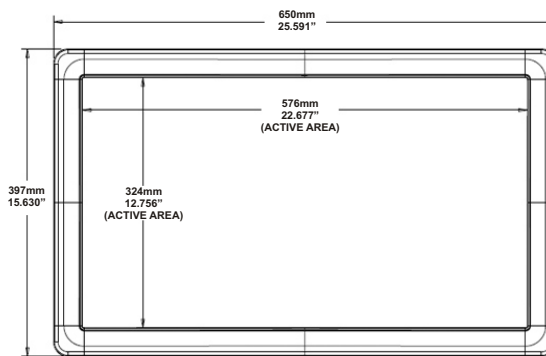

RECOMMENDED CUSTOMER PANEL CUT-OUT (See Note A)

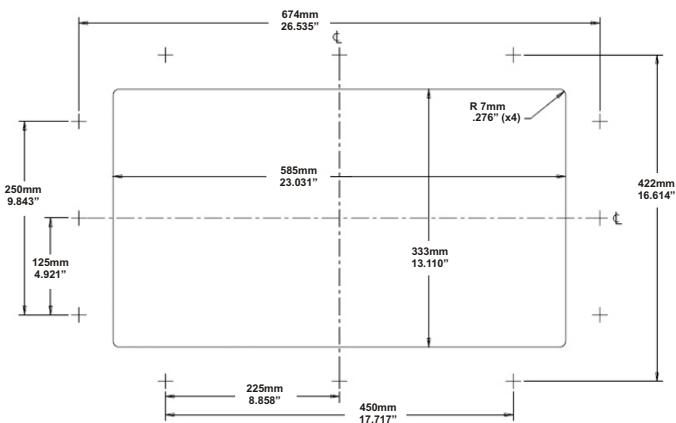

REAR MOUNT WITH BRACKETS, HORIZONTAL & VERTICAL

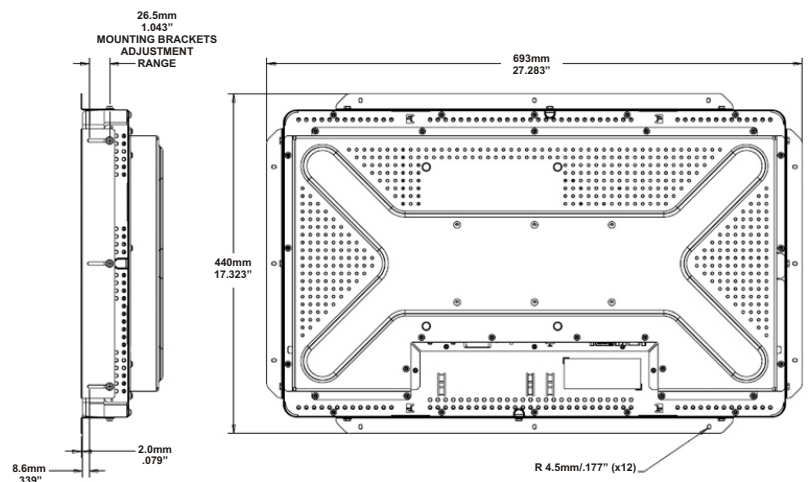

NOTE A
 CUSTOMER PANEL MATERIAL:

1. WOOD: Ø 4.5 HOLES THRU FOR M4 SCREWS W/NUTS, OR, NO THRU HOLES, SCREWS FOR WOOD Ø 4mm,
2. SHEET METAL: CONCEALED HEAD THREADED STUDS M4 W/NUTS.

